



XIAN HENG INTERNATIONAL



Product Tools for Electrical Construction Catalogue



To Make a World Famous Brand from China



One Stop Solution Provider

Xianheng International Science&Technology Co., Ltd.
Listed on the main board of Shanghai Stock Exchange, stock code 605056

Xianheng Technology Building, No. 101 Xinghuang Lane, Dongxin Street, Gongshu District,
Hangzhou, 310022, China.
Tel: +86-571-88322170
Fax: +86-571-88865359
E-mail: exp@xianhengguoji.com



www.xianhengintl.cn

Xianheng International Science&Technology Co., Ltd.



Headquarter

Industrial park

Showroom

Xianheng International

Enterprise Introduction

Xianheng International Science&Technology Co., Ltd. public listing on the main board of Shanghai Stock Exchange, is an MRO intensive supplier of tools, instruments with several factories of our own producing different kinds of products. It mainly serves the power industry, and also involves emergency, railway, urban rail transit, petroleum and petrochemical, etc.

Through fast development and professional capability, our factory Hangzhou Bete Equipment Manufacture Co., Ltd. (wholly owned subsidiary) is rated as National High-tech Enterprise, Zhejiang Excellent and Innovative Enterprise, and also passed ISO9001:2015 certification, CE certificate and over 70 Letters of Patent. Every link including product research and development, manufacture, debugging, and technical support follows strict and scientific management principles.

Continuous efforts contribute a lot to our good reputation and wide acceptance from the market. In recent years, we have established a long-term and win-win cooperation with customers from America, Europe, Southeast Asia, Africa and Middle East. Welcome to our company to create a good business relationship in near future.

"Market-oriented, quality-survival, innovation-oriented development, service as the purpose", we wholeheartedly provide you with quality products and intimate services! Warmly welcome friends at home and abroad to visit our company!

About Us

FULL



No.1 Quality electric construction tools in China

Trustworthy

Trustworthy public listed company in Shanghai Stock Exchange

Life-time

Life-time After-sales Service

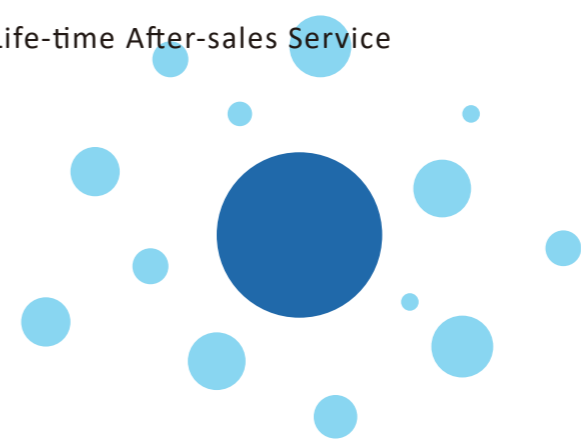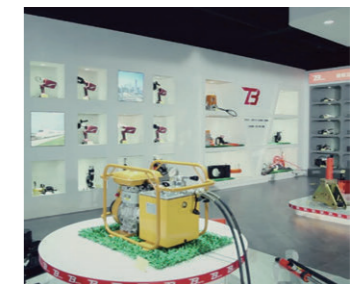



Hydraulic Crimping Tools


<p>ECT-6022</p>  <p>Battery powered crimping tool ◆ Crimping Force: 6t ◆ Crimping: Max 300mm²</p>	<p>ECT-12042</p>  <p>Battery powered crimping tool ◆ Crimping Force: 12t ◆ Crimping: Max 400mm²</p>	<p>ECT-6030</p>  <p>Dieless battery powered crimping tool ◆ Crimping Force: 6t ◆ Crimping: Max 300mm²</p>	<p>ECT-120H</p>  <p>Battery powered crimping tool ◆ Crimping Force: 12t ◆ Crimping: Max 400mm²</p>
<p>ECT-15050</p>  <p>Battery powered crimping tool ◆ Crimping Force: 15t ◆ Crimping: Max 630mm²</p>	<p>ECT-60UNV</p>  <p>Multi-functional battery powered tool ◆ Force: 6t ◆ Crimping: Max 300mm² ◆ Cutting: Max 40mm Cu/Al/ACSR ◆ Punching: Max 3.5mm thick, Ø64mm</p>	<p>ECT-120UNV</p>  <p>Multi-functional battery powered tool ◆ Force: 12t ◆ Cutting: Max 44mm ACSR ◆ Crimping: Max 400mm² ◆ Punching: Max 6.5mm thick ◆ Nut splitting: Max 36mm nut</p>	<p>ECT-17020H</p>  <p>Battery powered crimping tool ◆ Force: 17t ◆ Crimping: Max 630mm²</p>
<p>ECT-150</p>  <p>Battery powered mini crimping tool ◆ Crimping Force: 3.5t ◆ Crimping: Max Cu 150mm²</p>	<p>ECT-6022M</p>  <p>Battery powered mini crimping tool ◆ Crimping Force: 6t ◆ Crimping: Max Cu300mm²/Al240mm²</p>	<p>ECT-240</p>  <p>Battery powered mini crimping tool ◆ Crimping Force: 6t ◆ Crimping: Max Cu240mm²/Al185mm²</p>	<p>ECT-1510</p>  <p>Battery powered terminal crimping tool ◆ Crimping Force: 1.5t ◆ Crimping: Max 50mm²</p>

<p>EMP-2232</p>  <p>Battery powered pipe crimping tool ◆ Crimping : Max Thin-walled stainless steel DN28 thin-walled copper tube D35 aluminum plastic composite pipe DN40</p>	<p>EMP-3250</p>  <p>Battery powered pipe crimping tool ◆ Crimping : 12-54mm thin wall stainless steel pipe, copper pipe</p>	<p>EC-JKY</p>  <p>Hydraulic electric AMPACT tool ◆ Crimping Force: 6t ◆ Small/big head: 95/126mm</p>	<p>XH-50X</p>  <p>Battery powered crimping tool ◆ Crimping range: 0.5-50mm²</p>	
<p>HCT-185</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 5t ◆ Crimping Capacity: Max 185mm²</p>	<p>HCT-6022</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 6t ◆ Crimping Capacity: Max 300mm²</p>	<p>HCT-12042</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 12t ◆ Crimping Capacity: Max 400mm²</p>	<p>HCT-6030</p>  <p>Dieless hand hydraulic crimping tool ◆ Crimping Force: 6t ◆ Crimping Capacity: Max 300mm²</p>	
<p>EP-431</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 12t ◆ Crimping Capacity: Max 300mm²</p>	<p>EP-510C</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 13t ◆ Crimping Capacity: Max 400mm²</p>	<p>JKY</p>  <p>Hydraulic manual AMPACT tool ◆ Crimping Force: 6t ◆ Small/big head: 95/126mm</p>	<p>CW-1632</p>  <p>Hand pipe crimping tool ◆ Crimping Force: 4t</p>	<p>YQK-1632</p>  <p>Hand pipe crimping tool ◆ Crimping Force: 8t</p>
<p>BQK-70</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 6t ◆ Crimping Capacity: Max 70mm²</p>	<p>BQK-120</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 8t ◆ Crimping Capacity: Max 120mm²</p>	<p>BQK-240</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 12t ◆ Crimping Capacity: Max 240mm²</p>	<p>BQK-300</p>  <p>Hand hydraulic crimping tool ◆ Crimping Force: 13t ◆ Crimping Capacity: Max 300mm²</p>	

<p>PCS-22</p>  <p>Hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 6t ◆ Crimping: Max 300mm² 	<p>PCS-12042</p>  <p>Hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 12t ◆ Crimping: Max 400mm² 	<p>PCS-610</p>  <p>Hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 15t ◆ Crimping: Max 630mm² 	<p>PCS-25</p>  <p>Hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 25t ◆ Crimping: Max 630mm² 	<p>PCS-45</p>  <p>Hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 45t ◆ Crimping: Max 800mm²
---	--	--	--	---

<p>PCS-60</p>  <p>Hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 60t ◆ Crimping: Cu/Al Max 60mm Steel Max 26mm 	<p>PCS-60A</p>  <p>Hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 60t ◆ Crimping: Cu/Al Max 60mm Steel Max 26mm 	<p>PCS-100</p>  <p>Double action hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 100t ◆ Crimping: Cu/Al Max 76mm Steel Max 36mm 	<p>PCS-200</p>  <p>Double action hydraulic crimping head</p> <ul style="list-style-type: none"> ◆ Crimping Force: 200t ◆ Crimping: Cu/Al Max 100mm Steel Max 50mm
--	--	---	--

					
3.5t Dies	5t Dies	5.2t Dies	6t Hexagonal dies	12t Hexagonal dies	12t Indent dies
					
12t Clamp dies	12t H clip dies	12t Prerounding dies	12t Al dies	12t Cutting dies	15t Hexagonal dies
					
15t Clamp dies	15t Hexagonal dies	25t Hexagonal dies	45t Hexagonal dies	60t Hexagonal dies	100t Dies
					
200t Dies	UA22 Conversion dies	12t Conversion dies	EK135 Conversion dies	15t Conversion dies	25t Conversion dies

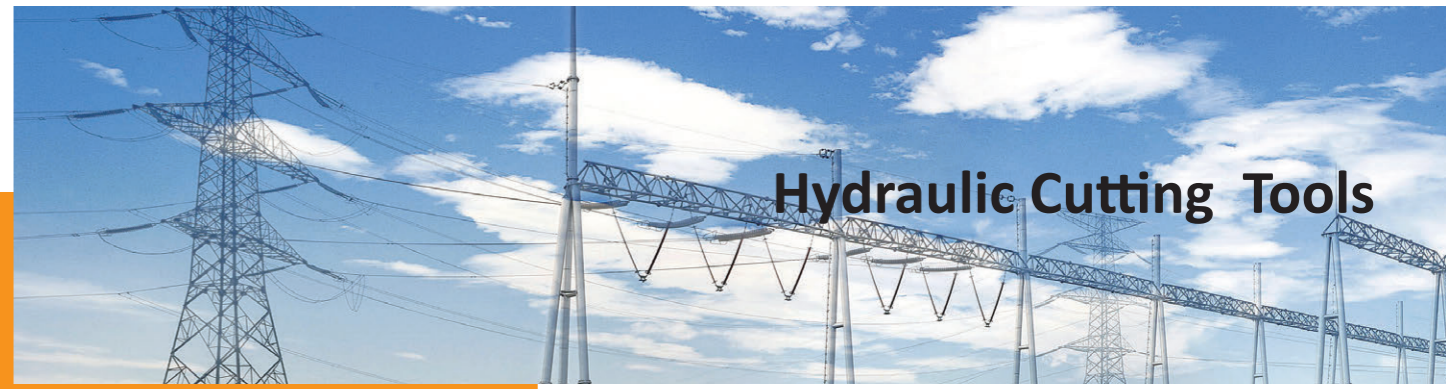


Hydraulic Cutting Tools




<p>ECT-45</p>  <p>Battery powered cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Φ45mm Cu/Al/ACSR Max Φ12mm steel bar 	<p>ECT-50</p>  <p>Battery powered cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Φ50mm Cu/Al 10kV single-core cable 400mm² 	<p>ECT-55</p>  <p>Battery powered cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Φ55mm Cu/Al/ACSR Max Φ22mm steel bar 	<p>ECT-85</p>  <p>Battery powered cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Φ85mm Cu/Al Max (10kV)3x185mm² armored cable
--	--	---	---

<p>ECT-105</p>  <p>Battery powered cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Φ105mm Cu/Al Max (10kV)3x300mm² armored cable 	<p>ECT-105C</p>  <p>Battery powered cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Φ105mm Cu/Al Max (10kV)3x300mm² armored cable 	<p>RC-54</p>  <p>Battery powered ratchet cable cutter</p> <ul style="list-style-type: none"> ◆ Cutting: Max Φ54mm Cu/Al 	<p>RC-54AC</p>  <p>Battery powered ratchet cable cutter</p> <ul style="list-style-type: none"> ◆ Cutting: Max Φ54mm Cu/Al, 100mm² copper strand wire Max 240mm² Steel-core ACSR
--	---	---	---

<p>ECT-32L</p>  <p>Battery powered mini cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 1.5t ◆ Cutting: Max Φ32mm single-core Cu/Al cable 	<p>ECT-30MC</p>  <p>Battery powered mini cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max 240mm² insulated conductor, 300mm² bare conductor, Φ32mm single-core Cu/Al cable 	<p>ECT-25</p>  <p>Battery powered mini cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Φ25mm Cu/Al cable bare conductor 	<p>HC-45</p>  <p>Hand hydraulic cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Φ45mm Cu/Al/ACSR Max Φ12mm steel bar
---	---	---	--

<p>HC-50</p>  <p>Hand hydraulic cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Ø50mm Cu/Al 10kV single-core cable 400mm² 	<p>HC-55</p>  <p>Hand hydraulic cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Ø55mm Cu/Al/ACSR Max Ø22mm steel bar 	<p>HC-85</p>  <p>Hand hydraulic cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Ø85mm Cu/Al Max (10kV)3x185mm² armored cable 	<p>PC-30C</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 4.5t ◆ Cutting: Max 300mm² single core cable
---	---	--	---



<p>PC-40</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Ø40mm flat copper wire 	<p>PC-45</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Ø45mm Cu/Al/ACSR Max Ø12mm steel bar 	<p>PC-50</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Ø50mm Cu/Al 	<p>PC-55</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Ø55mm Cu/Al/ACSR Max Ø22mm steel bar
--	---	---	--

<p>PC-85</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 6t ◆ Cutting: Max Ø85mm Cu/Al Max 3x185mm² armored cable 	<p>PC-105</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Ø105mm Cu/Al Max 3x300mm² armored cable 	<p>PC-120C</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Ø120mm armored Cu/Al 	<p>PC-132</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 10t ◆ Cutting: Max Ø132mm armored Cu/Al
---	---	---	---

<p>PC-160B</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 18t ◆ Cutting: Max Ø160mm armored Cu/Al 	<p>PC-170</p>  <p>Hydraulic cutting head</p> <ul style="list-style-type: none"> ◆ Cutting Force: 30t ◆ Cutting: Max Ø160mm armored Cu/Al 	<p>HICT-132-35kV</p>  <p>Insulated hydraulic cutting tool with hand & foot pump</p> <ul style="list-style-type: none"> ◆ Cutting Force: 10t ◆ Cutting: Max Ø132mm armored Cu/Al 	<p>ESIC-132-35kV</p>  <p>Insulated hydraulic cutting tool with electric pump (wireless remote control)</p> <ul style="list-style-type: none"> ◆ Cutting Force: 10t ◆ Cutting: Max Ø132mm armored Cu/Al
---	---	---	---


<p>EICT-132-35kV</p>  <p>Insulated hydraulic cutting tool with electric pump</p> <ul style="list-style-type: none"> ◆ Cutting Force: 10t ◆ Cutting: Max Ø132mm armored Cu/Al 	<p>ESS-105-10kV</p>  <p>Hand held insulated hydraulic cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 12t ◆ Cutting: Max Ø105mm armored Cu/Al 	<p>ESS-120-35kV</p>  <p>Wireless insulated hydraulic cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 10t ◆ Cutting: Max Ø120mm armored Cu/Al 	<p>ESS-120C-35kV</p>  <p>Wireless insulated hydraulic cutting tool</p> <ul style="list-style-type: none"> ◆ Cutting Force: 10t ◆ Cutting: Max Ø120mm armored Cu/Al
---	---	--	---

<p>CCST-220</p>  <p>Cable spiking tool</p> <ul style="list-style-type: none"> ◆ Puncturing Diameter: 135mm ◆ Puncturing Depth: 55mm 	<p>ESCT-220</p>  <p>Cable spiking tool with wireless remote control</p> <ul style="list-style-type: none"> ◆ Puncturing Diameter: 160mm ◆ Puncturing Depth: 55mm 	<p>BC-150V</p>  <p>Busbar cutting tool</p> <ul style="list-style-type: none"> ◆ Max Cutting Thickness: 12mm ◆ Max Cutting Width: 150mm 	<p>BC-200V</p>  <p>Busbar cutting tool</p> <ul style="list-style-type: none"> ◆ Max Cutting Thickness: 12mm ◆ Max Cutting Width: 200mm
--	---	---	---

<p>BC-200/16</p>  <p>Busbar cutting tool</p> <ul style="list-style-type: none"> ◆ Max Cutting Thickness: 16mm ◆ Max Cutting Width: 200mm 	<p>SHAB-80B(blue) SHAB-80C(black)</p>  <p>Busbar punching tool</p> <ul style="list-style-type: none"> ◆ Max Thickness: Cu/Al 13mm, Plain Steel 10mm 	<p>SH-100D</p>  <p>Busbar punching tool</p> <ul style="list-style-type: none"> ◆ Max Thickness: Cu/Al 20mm, Plain Steel 16mm 	<p>ESH-25</p>  <p>Battery powered punching tool</p> <ul style="list-style-type: none"> ◆ Output Force: 12t ◆ Max Thickness: Angle steel 6mm Cu/Al 6.5m
---	---	--	---

<p>ECT-UA6P</p>  <p>Battery powered steel sheet punching tool</p> <ul style="list-style-type: none"> ◆ Punching: Plain steel plate 3.5mm thick, ½-3"Stainless steel: 2.5mm thick, ½-3" 	<p>BH-10B</p>  <p>Sheet steel puncher</p> <ul style="list-style-type: none"> ◆ Punching: Plain sheet steel 3.2mm Stainless sheet steel 1.6mm ◆ Punching Range: 21.8-115.5mm 	<p>CGK-1</p>  <p>Mechanical punching tool</p> <ul style="list-style-type: none"> ◆ Punching Thickness: ≤10mm 	<p>EH-20</p>  <p>Battery powered punching tool</p> <ul style="list-style-type: none"> ◆ Punching Thickness: Max Cu/Al 8mm Steel plate 6mm
--	--	--	---

LB-150A



Busbar bending tool

- ◆ Bending Thickness: 12mm
- ◆ Bending Width: 150mm

LB-200C



Busbar bending tool

- ◆ Bending Thickness: 12mm
- ◆ Bending Width: 200mm

LB-200/16



Busbar bending tool

- ◆ Bending Thickness: 16mm
- ◆ Bending Width: 200mm

OK-101



Mini busbar bending tool

- ◆ Max Bending Capacity: Cu/Al 40mm×8mm

OK-205A



Multifunctional busbar bending tool

- ◆ Horizontal Bending: Max 125mm×16mm Cu/Al
- ◆ Vertical Bending: Max 125mm×12mm Cu/Al

OK-2510-PC



Multifunctional busbar & pipe bending tool

- ◆ Horizontal Bending: Max 125mm×16mm Cu/Al
- ◆ Vertical Bending: Max 125mm×12mm Cu/Al
- ◆ Pipe Bending: 3"

PB-4



Hydraulic pipe bending tool

- ◆ Output Force: 20t
- ◆ Pipe Bending: 4"

OK Series



Multifunctional busbar processing machine

- ◆ Function: Cutting, Punching, Horizontal Bending, Vertical Bending, Pipe Bending

EPCB Series



Multifunctional busbar processing machine

- ◆ Function: Cutting, Punching, Horizontal Bending, Vertical Bending

ECT-MM36



Battery powered nut splitter

- ◆ Force: 10t
- ◆ Destruction Ability: M8-M24 nut

HC-MM36



Hand nut splitter

- ◆ Force: 10t
- ◆ Destruction Ability: M8-M24 nut

HSC-MM36



Hydraulic nut splitter

- ◆ Force: 12t
- ◆ Destruction Ability: M8-M24 nut

KSC Series



Mechanical nut splitter

- ◆ Hex Nut Range: 4-36mm


HSC Series



Hydraulic nut splitter

- ◆ Nut Range: M6-M33
- ◆ Hex Nut Range: 10-50mm

SAC-110



Hydraulic angle steel cutting tool

- ◆ Cutting Force: 45t
- ◆ Cutting Capacity: 110x110x10mm

Hydraulic Pumps

HP-700



Hydraulic hand pump

- ◆ Oil Delivery at High Pressure: 2.5cc/stroke
- ◆ Oil Delivery at Low Pressure: 11.5cc/stroke

HP-700A



Hydraulic hand pump

- ◆ Oil Delivery at High Pressure: 2.26cc/stroke
- ◆ Oil Delivery at Low Pressure: 12.26cc/stroke

HP-700D



Hydraulic hand pump

- ◆ Oil Delivery at High Pressure: 5.75cc/stroke
- ◆ Oil Delivery at Low Pressure: 125cc/stroke

FHP-700



Hydraulic foot and hand pump

- ◆ Oil Delivery at High Pressure: 2.26cc/stroke
- ◆ Oil Delivery at Low Pressure: 12.26cc/stroke

ECT-700



Battery powered hydraulic pump

- ◆ Reservoir Capacity: 200mL
- ◆ Voltage Power: 18.0V DC

REP-1



Hydraulic electric pump

- ◆ Oil Delivery at High Pressure: 0.7L/min
- ◆ Oil Delivery at Low Pressure: 6L/min
- ◆ Voltage power: AC220V/750W

REP-2



Hydraulic electric pump

- ◆ Oil Delivery at High Pressure: 0.32L/min
- ◆ Oil Delivery at Low Pressure: 2.6L/min
- ◆ Voltage power: AC220V/340W

REP-2D



Double action hydraulic electric pump

- ◆ Oil Delivery at High Pressure: 0.3L/min
- ◆ Oil Delivery at Low Pressure: 4L/min
- ◆ Voltage power: AC220V/370W

EBH-700



Chargeable battery pump

- ◆ Oil Delivery at High Pressure: 0.2L/min
- ◆ Oil Delivery at Low Pressure: 1.3L/min
- ◆ Voltage power: 18.0V DC

HPG-700



Double action gasoline engine pump

- ◆ Oil Delivery at High Pressure: 1.2L/min
- ◆ Oil Delivery at Low Pressure: 7.5L/min
- ◆ Reservoir Capacity: 10L

HPG-700MX



Remote control double action gasoline engine pump

- ◆ Oil Delivery at High Pressure: 1.2L/min
- ◆ Oil Delivery at Low Pressure: 7.5L/min
- ◆ Reservoir Capacity: 10L

ESG-700MX



Electric pump

- ◆ Oil Delivery at High Pressure: 1.2L/min
- ◆ Oil Delivery at Low Pressure: 7.5L/min
- ◆ Reservoir Capacity: 10L



Railway Tools















Hydraulic Torque Wrench Series

<p>ECT-60DX</p> <p>Battery hanging string crimping tool ◆ Force: 6t ◆ Stroke: 17mm</p>	<p>HCT-60DX</p> <p>Hand hanging string crimping tool ◆ Force: 6t ◆ Stroke: 17mm</p>	<p>EZ45A2T</p> <p>Battery contact wire cutter ◆ Applicable for Wire: 85, 110, 120, 150mm² ◆ Speed of Rotation: 3400rpm ◆ Saw Blade Diameter: 135mm</p>	<p>ECT-4</p> <p>Battery contact wire cutter ◆ Trolley Cable: 85, 110, 120, 150mm² ◆ Carrier Cable: 35, 50, 70, 95, 120, 150mm²</p>	
<p>ECT-4M</p> <p>Battery contact wire cutter ◆ Trolley Cable: 85, 110, 120, 150mm² ◆ Carrier Cable: 35, 50, 70, 95, 120, 150mm²</p>	<p>HCT-4</p> <p>Manual contact wire cutter ◆ Trolley Cable: 85, 110, 120, 150mm² ◆ Carrier Cable: 35, 50, 70, 95, 120, 150mm²</p>	<p>PCS-25XZ</p> <p>Contact wire straightening tool ◆ Straightening Dies: 85, 110, 120, 150mm²</p>	<p>EXZ-150</p> <p>Battery contact wire straightening tool ◆ Force: 10t ◆ Straightening Range: 85-150mm²</p>	
<p>PXZ-150</p> <p>Contact wire straightening head ◆ Force: 5t ◆ Straightening Range: 85-150mm²</p>	<p>PCS-25DL</p> <p>Electric connection crimping head</p>	<p>TCS-5</p> <p>Contact wire straightening tool ◆ Applicable: 85, 110, 120, 150mm²</p>	<p>BT-JW</p> <p>Contact wire gripper</p>	<p>BW-12</p> <p>Steel bar bending Tool ◆ Used for steel bar and ground wire bending</p>

<p>MXTA Series</p> <p>Driving type hydraulic torque wrench ◆ Torque Range: 112-48666 N.m ◆ Bolt spec.: 14-120 M</p>	<p>LOW Series</p> <p>Hollow hydraulic torque wrench ◆ Torque Range: 232-44593 N.m ◆ A/F: 19-175M</p>	<p>Special sockets for MXTA series of driving type hydraulic torque wrench (CR-MO sockets)</p>	<p>ET Series</p> <p>Hollow hydraulic torque wrench working head</p>	<p>HTE Series</p> <p>Multi-stage bolt stretcher for wind power ◆ Stretch force: 656-2196kN ◆ Stroke: 8-12mm</p>
<p>HEP-700</p> <p>Special electric pump for torque wrench ◆ Oil Flow at Low Pressure: 7L/min ◆ Oil Flow at Medium Pressure: 1.6L/min ◆ Oil Flow at High Pressure: 0.8L/min</p>	<p>REH-200R</p> <p>Special electric hydraulic pump for bolt stretcher ◆ Oil Delivery at Low Pressure: 2L/min ◆ Oil Flow at High Pressure: 0.4L/min ◆ Motor power: 1.5kW</p>	<p>HSP Series</p> <p>Three jaws hydraulic puller ◆ Force: 6-30t ◆ Stroke: 70-111mm</p>	<p>HSP Series</p> <p>Two jaws hydraulic puller ◆ Force: 6-12t ◆ Stroke: 70-85mm</p>	<p>BT Series</p> <p>Pulling sets ◆ Stretch range: 30-200mm</p>
<p>ESP Series</p> <p>Separated three-jaw hydraulic puller ◆ Force: 6-30t ◆ Stroke: 70-111mm</p>	<p>ESP Series</p> <p>Separated two-jaw hydraulic puller ◆ Force: 8-12t ◆ Stroke: 85mm</p>	<p>SWR-40</p> <p>Hydraulic flange spreader ◆ Force: 14t ◆ Top Gap: 6mm ◆ Stretch Distance: 81mm</p>	<p>SWR-8</p> <p>Hydraulic flange spreader ◆ Force: 8t ◆ Top Gap: 6mm ◆ Stretch Distance: 81mm</p>	<p>SWR-401</p> <p>Hydraulic flange spreader ◆ Force: 15t ◆ Top Gap: 6mm ◆ Stretch Distance: 81mm</p>



Cable Preparation Tools

<p>ACSR-1250</p>  <p>Aluminum conductor cutter for ACSR ◆ Used to cut aluminum conductor of ACSR 1140 to 1250mm²</p>	<p>ACSR-87</p>  <p>Aluminum conductor cutter for ACSR ◆ Used to cut aluminum conductor of ACSR below 800mm²</p>	<p>CST640</p>  <p>Strippable semi-con stripper ◆ Stripping Range: Φ20-Φ41mm</p>	<p>CST531</p>  <p>Main insulation stripper ◆ Stripping Range: Φ15-Φ54mm</p>
<p>CST310</p>  <p>10kV Insulation chamfer tool ◆ Applied to XLPE dia. 18-32 mm insulation layer</p>	<p>CST335</p>  <p>35kV Insulation chamfer tool ◆ Applied to XLPE dia. 32-54 mm insulation layer</p>	<p>CST240</p>  <p>35kV Insulation chamfer tool ◆ Applied to XLPE cable diameter Φ15-60mm</p>	<p>CST235</p>  <p>Non-strippable semi-con stripper ◆ Stripping Range: Φ30-Φ54mm</p>
<p>CST622</p>  <p>Cable jacket stripper ◆ Stripping Range: Φ≥25mm</p>	<p>PG-110/220</p>  <p>PG series bellows stripping tool ◆ Stripping Range: Φ50-Φ160mm</p>	<p>CST320</p>  <p>10kV Cable sharpening set ◆ Cable Diameter from 18 mm to 32 mm</p>	<p>SH-50</p>  <p>Ring type stripper ◆ Stripping Range: Φ15-Φ50mm</p>

<p>CST20/40A</p>  <p>10kV Main insulation stripper ◆ Stripping Range: Φ20-Φ40mm</p>	<p>CST20/40B</p>  <p>Semi-con stripper ◆ Stripping Range: Φ20-Φ40mm</p>	<p>CST15/65A</p>  <p>35kV Main insulation stripper ◆ Stripping Range: Φ32-Φ65mm</p>	<p>CST15/65B</p>  <p>Semi-con stripper ◆ Stripping Range: Φ32-Φ65mm</p>
<p>CST300</p>  <p>Wire stripping plier ◆ Stripping Range: 70-300mm² (Φ15-Φ30mm)</p>	<p>CST35/95</p>  <p>110kV Main insulation and outer semi-con stripping tool ◆ Cable diameter from 35 mm to 90 mm</p>	<p>CST90/150</p>  <p>220kV Main insulation and outer semi-con stripping tool ◆ Cable diameter from 90 mm to 150 mm</p>	<p>CST126</p>  <p>High voltage cable stripper ◆ Stripping Range: Φ60-Φ128mm</p>
<p>FL-135</p>  <p>10-35kV Cable preparation set</p>	<p>FL-210</p>  <p>10kV Economical cable preparation set</p>	<p>FL-235</p>  <p>35kV Economical cable preparation set</p>	<p>SBX-30</p>  <p>Rotary cable stripper ◆ Stripping Range: 35-300mm²</p>
<p>JJ40</p>  <p>Insulated conductor stripping knife ◆ Stripping Range: Φ14-Φ32mm</p>	<p>NP-400</p>  <p>Overhead insulation cable stripper ◆ Cable Diameter: 10-30mm</p>	<p>CS-130B</p>  <p>Cable straightening tool ◆ Output Force: 5t ◆ Cable Diameter: ≤Φ130mm</p>	<p>CS-160B</p>  <p>Cable straightening tool ◆ Output Force: 5t ◆ Cable Diameter: ≤Φ160mm</p>



BTJM-3

Engine powered winch

- ◆ Pull Force: high gear 15kN
low gear 30kN



BTJM-5

Engine powered winch

- ◆ Pull Force: high gear 25kN
low gear 50kN



DS-180

Cable feeder

- ◆ Feeding Range: $\Phi 30\text{-}\Phi 180\text{mm}$
◆ Speed: 7m/min



DS-180A

Cable feeder

- ◆ Feeding Range: $\Phi 30\text{-}\Phi 180\text{mm}$
◆ Speed: 6m/min



CPEM-9031C

Electric cable polisher

- ◆ Grinding Strap Size: 30x533mm
◆ Grinding Speed: 200-1000m/min
◆ Motor Power: 200V/AC 550W



2TON

Power cable wire grip

- ◆ Applicable Range:
 $\Phi 4\text{-}\Phi 22\text{mm}(16\text{-}185\text{mm}^2)$



3TON

Power cable wire grip

- ◆ Applicable Range:
 $\Phi 16\text{-}\Phi 32\text{mm}(150\text{-}400\text{mm}^2)$



2TON-G

Wire grip for underground cable

- ◆ Applicable Range: $\Phi 5\text{-}\Phi 18\text{mm}$



3TON-G

Wire grip for underground cable

- ◆ Applicable Range: $\Phi 8\text{-}\Phi 24\text{mm}$



SKJL Series

Aluminum alloy insulated wire grip

- ◆ Applicable Range: $\Phi 10\text{-}\Phi 37\text{mm}$
◆ Rated Load: 10-30kN



SKL Series

Aluminum alloy wire grip

- ◆ Applicable Range: LGJ25-1520
◆ Rated Load: 7-100kN



SKLG Series

High strength optical cable grip for OPGW overhead line construction

- ◆ Applicable Range: $\Phi 8\text{-}\Phi 24\text{mm}$
◆ Rated Load: 25-60kN



SKDA Series

Ground wire clamp

- ◆ Applicable Range: $\Phi 11\text{-}\Phi 22\text{mm}$
◆ Rated Load: 30-70kN



SKDD-20

High strength steel alloy grounding wire grip for overhead line construction

- ◆ Rated Load: 20kN



SKST Series

Dual hinge grounding wire grip

- ◆ Rated Load: 10-30kN



SKG Series

Wire grip for anti-twisting steel wire rope

- ◆ Rated Load: 40-200kN



SKLBGJ Series

Aluminum alloy wire grip for Al-Clad steel stranded wire

- ◆ Rated Load: 30-60kN



SKDP-120

Multiple segments wire grip

- ◆ Applicable Range: $\Phi 30\text{-}\Phi 35\text{mm}$
◆ Rated Load: 120kN



SKG Series

Skg series round steel wire rope clamp

- ◆ Rated Load: 40-100kN



1000/1500/2000

Ratchet puller


- ◆ Traction Force: 1-2t
◆ working Length: 410-1870mm



P Series

Aluminum alloy chain lever hoist

- ◆ Working Capacity: 7.5-90kN
◆ Stretch Distance: 1800-2320mm

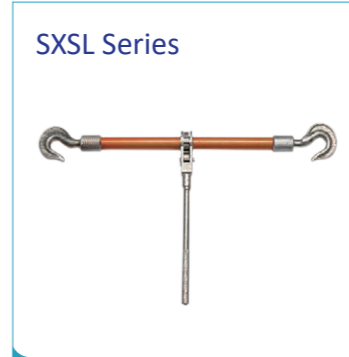

SXSL Series

Aluminum alloy dual-hook turnbuckle

- ◆ Rated Load: 10-50kN



SKSG Series

Steel dual-hook turnbuckle

- ◆ Rated Load: 10-100kN



SXTS Series

Telescope-feed dual-hook turnbuckle

- ◆ Rated Load: 10-50kN



SH Series

Large diameter cable roller

- ◆ Rated Load: 20-120kN



SHD Series

Cable roller

- ◆ Rated Load: 5-30kN
◆ Applicable Wire(ACSR): 25-500



SHG/SHGN Series

Cross arm-mounted dual purpose cable roller

- ◆ Rated Load: 5-20kN



SHCS-2

Cross arm-mounted three-purpose cable roller

- ◆ Rated Load: 20kN
◆ Applicable Wire(ACSR): ≤ 240



SHC/SHCN Series

Cross arm-mounted cable roller

- ◆ Rated Load: 5-20kN
◆ Applicable Wire(ACSR): 25-240



SHT/SHTN Series

Ground cable roller

- ◆ Rated Load: 10-20kN
◆ Applicable Steel Strands: 25-240



SDTG
SDTGN

Block stringing cable roller

- ◆ Rated Load: 30kN
◆ Wire Dia.: $\leq 34\text{mm}$

SHR-2.5
SHRN-2.5



Tandem drums cable roller

- ◆ Rated Load: 25kN
- ◆ Applicable Wire(ACSR): 300-500


SH Series



Small cable roller

- ◆ Rated Load: 5kN

SHL Series



Ground straight cable roller

- ◆ Rated Load: 5kN

THZI Series



High speed steering cable roller

- ◆ Rated Load: 50-300kN

ZQLN/ZQLL



Aluminum hoisting pulley

- ◆ Rated Load: 10-100kN
- ◆ Applicable Rope Dia.: ≤20mm

ZQS Series



Both side opening hoisting pulley with dual wheels

- ◆ Rated Load: 20-100kN
- ◆ Applicable Rope Dia.: ≤Φ18.5mm


SB Series



One draw two moving boards

- ◆ Rated Load: 80-250kN
- ◆ Applicable Stringing Block Sheave Width: 75-110mm

ZMZ Series



Ground drill

- ◆ Rated Tension: 10-50kN
- ◆ Max Depth: 1500mm


SHZI Series



Cable turning roller

- ◆ Rated Load: 10kN


SH Series



D series cable entrance protection roller

- ◆ Max Cable Dia.: 80-150mm

SHL Series



C, C1 series cable entrance protection roller

- ◆ Max Cable Dia.: 80-150mm

SH Series



Triple-drum cable roller, Pithead cable roller

- ◆ Rated Load: 10kN
- ◆ Max Cable Dia.: ≤100mm

STD-30
STD-55



Conductor lifter

- ◆ Rated Load: 30-55kN

SLU Series



U-Type anti-bending fixed joint

- ◆ Rated Load: 10-320kN

SLX Series



Swivel joint

- ◆ Rated Load: 10-250kN

ZFX Series



High strength shackle

- ◆ Rated Load: 10-300kN

SH Series



B series cable entrance protection roller

- ◆ Max Cable Dia.: 80-150mm


SHL Series



Ground corner cable roller

- ◆ Rated Load: 10kN
- ◆ Max Cable Dia.: ≤Φ120mm

SHCZ-5



Skyward corner stringing pulley

- ◆ Rated Load: 5kN
- ◆ Applicable ACSR Conductor: 25-185mm²

SHJ Series



Bunch conductor pulley

- ◆ Rated Load: 2kN

LL Series



High voltage cable pulling grip

- ◆ Diameter Range: 12-220mm

CL Series



Closed cable pulling grip

- ◆ Diameter Range: 7-150mm


SL Series



Unilateral cable pulling grip

- ◆ Diameter Range: 7-150mm

DL Series



Double eyes cable pulling grip

- ◆ Diameter Range: 12-150mm

SDJ Series



Grounding wire pulley

- ◆ Groove Dia.: Φ50mm
- ◆ Applicable Wire Type: Conductor/Grounding Wire
- ◆ Max Current: 100A

SHYX Series



Wire pulley for pressuring conductor

- ◆ Rated Load: 10-80kN

SHJ Series



Ending Pulley

- ◆ Rated Load: 30-80kN


ZQ Series



Steel hoisting pulley with steel casting sheave

- ◆ Rated Load: 10-100kN
- ◆ Applicable Steel Rope Dia.: Φ7.7-15.5mm

SW Series



Single side pull wrap cable pulling grip

- ◆ Diameter Range: 12-150mm

DW Series



Double sides pull wrap cable pulling grip

- ◆ Diameter Range: 12-150mm


RL Series



Rotation cable pulling grip

- ◆ Diameter Range: 15-110mm

FHL Series



Feeder cable hoisting grip

- ◆ Diameter Range: 7-35mm

TL Series



Terminal cable pulling grip

◆ Diameter Range: 7.6-31.8mm



High voltage cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 10-110mm



Closed cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 10-110mm



Three in one closed cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 15-63mm



Three in one high voltage cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 15-63mm

STF Series



Multiple fission conductor lifer

◆ Rated Load: 2x12-8x25 kN

SJYB Series



Splicing sleeve protector

◆ Applicable Conductor: ACSR240/55-ACSR1000/80

SXG Series



Steel wire rope hand wrenching tackle block

◆ Rated Load: 8-32kN

SZC Series



Conduits stand

◆ Conduits Diameter: Φ 11-14mm
◆ Length: 100-200m


YL Series



Anti-twisting braided steel rope

◆ Nominal Diameter: 9-32mm
◆ Breaking Force: 55-780kN

SRG Series



Steel rope reel stand

SRQ Series



Hydraulic puller dedicated steel rope reel stand

SBT-3A
SBT-5A



Adjustable hydraulic cable drum stand

◆ Rated Load: 3t/5t

SBT-5



Mechanical cable drum stand

◆ Rated Load: 5t

SBT-10



Mechanical cable drum stand

◆ Rated Load: 10t

SBT-20



Adjustable hydraulic cable drum stand

◆ Rated Load: 20t

Gardening Tools



JYGD-1
JYGD-2



Live work cleaning saw



Multifunctional set

EPS6010LI



Lithium battery powered pole trimmer saw

ECS6016LI



Lithium battery powered chain saw

EPT6020LI



Pole hedge trimmer

EBC6028LI



Hedge trimmer

EBC6026LI-2



Lawnmower

EBC6038LI-1



Lawnmower

BP-6040LI



Battery

CH6020LI



Charger

Insulated Products



P-IEP-1



Intelligent insulated cable stripper

RHCS-240E



Intelligent remote control cutter

P-IESQ-1



Battery powered shotgun stick

RHFS-21



Wireless remote control battery powered wrench

D-JQ-1



Battery powered remote control insulated clamp

XT-YJ-2



Wireless remote control hot-line work crimper (10kV)

IRHT Series
IRHD Series
IRH Series




Insulated rescue hook (Customization available)
◆ Length: 1-5m
◆ Voltage: 10-220kV

A80
A85
A90



Cable tying machine

BTJDS Series

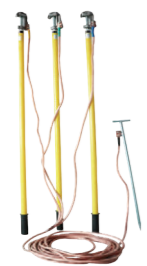

Portable earthing equipment (Combination type)
◆ Voltage: 0.4-220kV

BTJDD Series



Portable earthing equipment (Single phase type)
◆ Voltage: 0.4-500kV

BTJDB Series



Portable earthing equipment (Tandem type)
◆ Voltage: 0.4-220kV



Personal security line
◆ Voltage: 0.4-10kV



*Customization available

IR Series



Insulated triangle telescopic hot stick
◆ Extension Length: 3.8-12m

3.8-12m



Insulated triangle telescopic hot stick with double layer joint
◆ Extension Length: 3.8-12m

3.8-12m



Insulated triangle telescopic hot stick with measuring function
◆ Extension Length: 3.8-12m



Insulated triangle telescopic hot stick with positioning latch
◆ Extension Length: 3.8-12m

1.8-10m



Screw type insulated round telescopic hot stick
◆ Extension Length: 1.8-10m

1.8-12m



Button type insulated round telescopic hot stick
◆ Extension Length: 1.8-12m

SS Series



Insulated shotgun stick
◆ Extension Length: 1.8-4m

G-MH-1



Insulated hot stick



Insulated telescopic cargo scale
◆ Extension Length: 4.5-6m

ES9080



Non-contact high voltage detector
◆ Voltage: 380V; 6kV; 10kV; 27.5kV; 35kV; 110kV; 220kV; 500kV

EAV Series






























Audible & visible voltage detector
◆ Voltage: 0.4-500kV

EC Series



Full circuit electroscope
◆ Voltage: 0.4-500kV

 <p>BTJYD Series</p> <p>FRP insulated stool ◆ Steps: 1-4 ◆ Height: 40-160cm</p>	 <p>BTYGT Series</p> <p>FRP insulated rod ladder ◆ Steps: 6-12 ◆ Height: 2-5m</p>	 <p>BTDT Series</p> <p>FRP insulated single ladder ◆ Steps: 4-16 ◆ Height: 1.5-5m</p>	 <p>BTFRPL Series</p> <p>FRP straight ladder ◆ Steps: 8-20</p>
 <p>BTSST Series</p> <p>FRP extension ladder ◆ Steps: 2x8- 2x20 ◆ Height: 480-1200cm</p>	 <p>BTPPT Series</p> <p>FRP platform ladder ◆ Steps: 3-6 ◆ Height: 1440-2310mm</p>	 <p>BTAST Series BTADT Series</p> <p>FRP step ladder ◆ Steps: 3-12 ◆ Height: 90-360cm</p>	 <p>BTGJT Series</p> <p>FRP multipurpose ladder with big hinge ◆ Steps: 4x2 - 4x6</p>
 <p>Insulated blanket</p>	 <p>Insulated shawl</p>	 <p>Anti arc clothing Anti arc robe</p>	 <p>Anti arc helmet</p>
 <p>Anti arc gloves Anti arc shoe cover</p>	 <p>Transparent insulated jumper group</p>	 <p>Blanket clip</p>	 <p>Insulated glove gas-filled detector</p>

 <p>Bypass drop cable Bypass cable terminal head Bypass cable connector</p>	 <p>Leather gloves</p>	 <p>Latex insulation gloves</p>	 <p>Insulation boots</p>
 <p>Insulation-tube</p>	 <p>Shielding suit</p>	 <p>Insulation shoes Leather conductive shoes</p>	 <p>Helmet</p>
 <p>FRP tubular telescopic fence</p>	 <p>FRP flake telescopic fence</p>	 <p>FRP fixed fence</p>	 <p>Stainless steel flake telescopic fence</p>
 <p>Stainless steel arch telescopic fence</p>	 <p>Stainless steel belt telescopic fence</p>	 <p>Electric power identification network warning network</p>	 <p>Bracket</p>



PVC warning tape



PVC electrical tape



Magnetic warning tape




Safety warning tape




Flat trolley



PVC road cone
◆ Height: 30-90cm

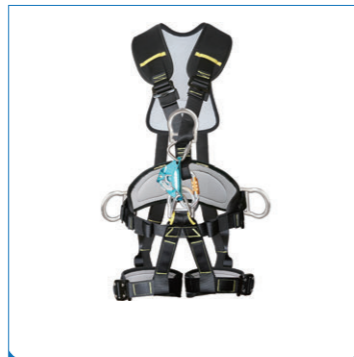

Safety harness

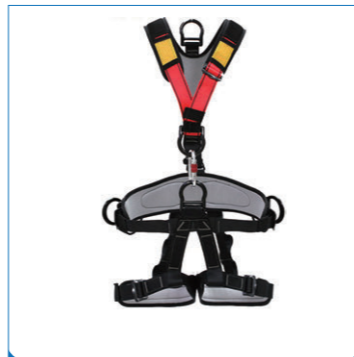

Safety harness




Safety harness



Safety harness



Safety harness

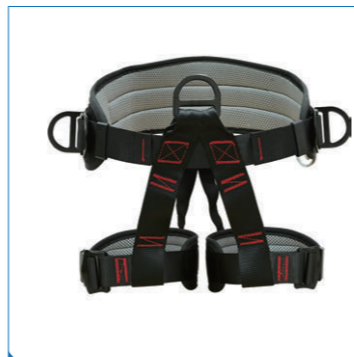


Safety harness



Rope O-hook



Rope large hook

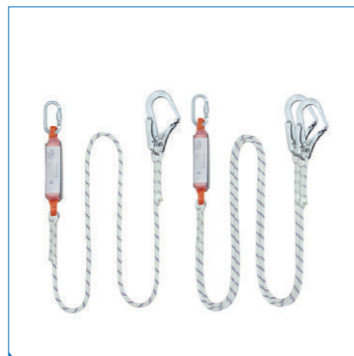

Rope large hook (with buffer bag)



Pole strap



Rope large hook



Rope large hook with buffer bag



Hook



Safety harness



Electric pole climbers



Electrician's foot buckle with heel



Fall arrester




Falling protector



Electrician climbing board



Flexible ladder

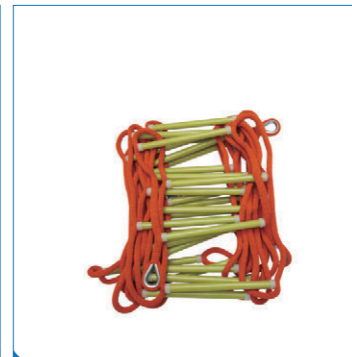

Moisture-proof flexible ladder




Al alloy flexible ladder



Rope



Moisture-proof silk insulation rope

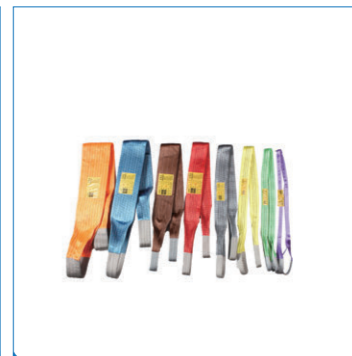


Lifting belt



Lifting belt



Bird Repeller

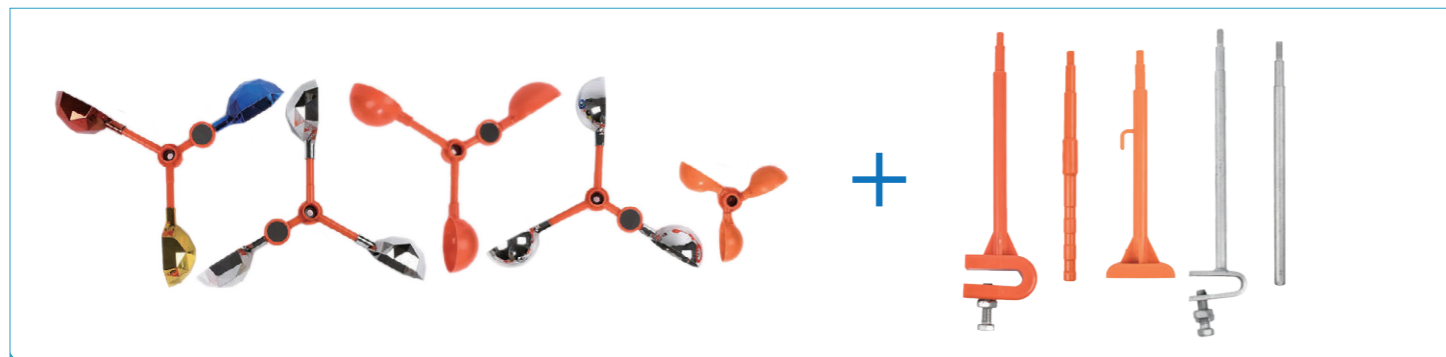

Bird repeller
 (This product is based on the characteristics of birds that are afraid of light and color, especially the habit of fearing flashes, and drive them away from the poles and towers. Prevent nesting outside to achieve the purpose of eliminating bird damage and ensuring safety.)



Bird repeller




Stainless steel bird repeller



Railway bird repeller




Bird repelling needle plate

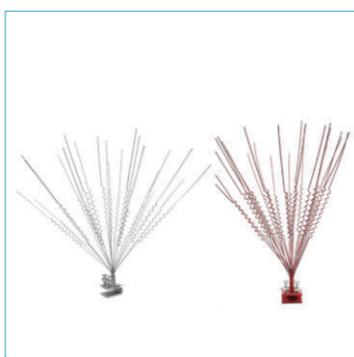

Anti-bird thorn



Animal repeller

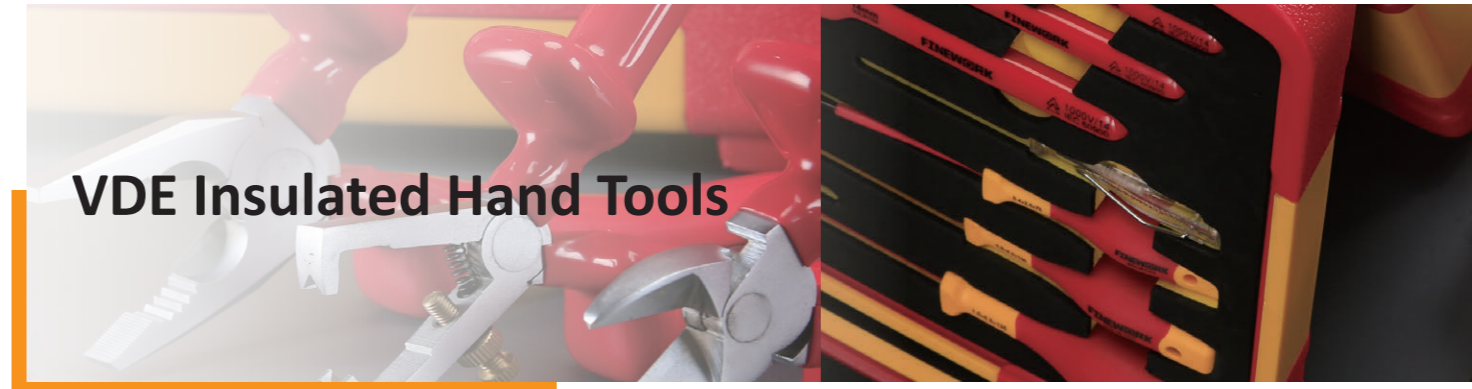

VDE Insulated Hand Tools



99LB101

48PCS Insulated tool set in suitcase



99LB105

68PCS Insulated tool set in suitcase



99LB106

116PCS Insulated tool set in trolley bag



99LB003

29PCS Insulated tool set



99LB004

18PCS Insulated tool set



99LB005

21PCS 1/2" Insulated socket set



99LB006

32PCS Insulated ratchet wrench set



92LB901

20PCS Insulated open end wrench set



99LB303

3PCS Insulated pliers set




92LB907

7PCS Insulated open end wrenches set



8PCS Insulated Screwdrivers set

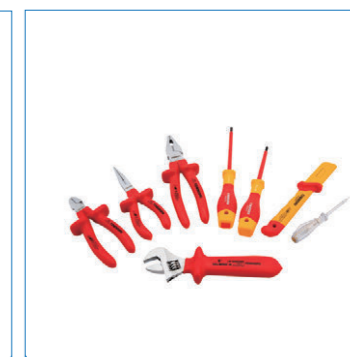

Wire Processing Tools



LK-22A
LK-38A



Cable cutter

◆ Cutting Capacity: Max 35mm²

NK-GS10



Cable cutter

◆ Cutting Capacity: Φ6mm

HS-206
HS-206B



Cable cutter

◆ Cutting Capacity: Max 35mm²

808-330A
HJ130
LK-60A



Cable cutter

◆ Cutting Capacity: Max 70mm²

CC-100L
CC-250L



Cable cutter

◆ Cutting Capacity: Max 250mm²

LK-100



Cable cutter

◆ Cutting Capacity: Φ14mm

LK-105



Cable cutter

◆ Cutting Capacity: Φ26mm

LK-201



Cable cutter

◆ Cutting Capacity: Φ26mm

HS-125



Cable cutter

◆ Cutting Capacity: Max 125mm²

LK-250
LK-500



Cable cutter

◆ Cutting Capacity: Max 500mm²

HS-300B
HS-500B



Ratchet cable cutter

◆ Cutting Capacity: Max 400mm²

LK-240A
LK-380A



Ratchet cable cutter

◆ Cutting Capacity: Max 380mm²

CC-325
CC-520



Ratchet cable cutter

◆ Cutting Capacity: Max Φ52mm Cu/Al

J38



Ratchet cable cutter

◆ Cutting Capacity: Max 300mm²

LK-960



Ratchet cable cutter

◆ Cutting Capacity: Max 960mm²

HS-765



Ratchet cable cutter

◆ Cutting Capacity: Max 400mm²

LK-240



Ratchet cable cutter

◆ Cutting Capacity: Max 240mm²

LK-760L



Ratchet cable cutter

◆ Cutting Capacity: Max 500mm²

LK-380



Ratchet cable cutter

◆ Cutting Capacity: Max 380mm²

J13



Manual ratchet cable cutter

◆ Cutting Capacity: Max 720mm² ACSR
Max 100mm² Galvanized steel strand

CC-100L
CC-250L



Cable cutter

◆ Cutting Capacity: Max 250mm²

LK-100



Cable cutter

◆ Cutting Capacity: Φ14mm

LK-105



Cable cutter

◆ Cutting Capacity: Φ26mm

LK-201



Cable cutter

◆ Cutting Capacity: Φ26mm


J25



Manual ratchet cable cutter

◆ Cutting Capacity: Max 800mm² ACSR
Max 240mm² Galvanized steel strand

J30



Manual ratchet cable cutter

◆ Cutting Capacity: Max 720mm² ACSR
Max 150mm² Galvanized steel strand


J40



Manual ratchet cable cutter

◆ Cutting Capacity: 400mm²(≤Φ38mm)
armored Cu/Al

J50



Manual ratchet cable cutter

◆ Cutting Capacity: Max 1440mm² ACSR
Max 180mm² Galvanized steel strand

HS-125



Cable cutter

◆ Cutting Capacity: Max 125mm²

LK-250
LK-500



Cable cutter

◆ Cutting Capacity: Max 500mm²

HS-300B
HS-500B



Ratchet cable cutter

◆ Cutting Capacity: Max 400mm²

LK-240A
LK-380A



Ratchet cable cutter

◆ Cutting Capacity: Max 380mm²

J52



Manual ratchet cable cutter

J75



Manual ratchet cable cutter

J100



Manual ratchet cable cutter

◆ Cutting Capacity: 3x300mm²
(≤Φ100mm) armored Cu/Al

J130



Manual ratchet cable cutter

◆ Cutting Capacity: 4x300mm²
(≤Φ120mm) armored Cu/Al

<p>HT Series</p>  <p>Mechanical crimping tool ◆ Crimping Capacity: Max 150mm²</p>	<p>T-J6</p>  <p>Pre-insulated terminal crimper ◆ Crimping Capacity: Max 6mm²</p>	<p>TH-10</p>  <p>Insulated and non-insulated sleeve crimping tool ◆ Crimping Capacity: Max 10mm²</p>	<p>T-S10L</p>  <p>Bare terminal crimping tool ◆ Crimping Capacity: Max 10mm²</p>
--	--	---	--

<p>T-S6L</p>  <p>Non-preinsulated terminal crimper ◆ Crimping Capacity: Max 6mm²</p>	<p>TC-6</p>  <p>Sleeve terminal crimping tool ◆ Crimping Capacity: Max 6mm²</p>	<p>HSC8 Series</p>  <p>Mini-type self-adjustable crimping plier ◆ Crimping Capacity: Max 16mm²</p>	<p>DR Series</p>  <p>Super strength-saving crimping plier ◆ Crimping Capacity: Max 16mm²</p>
--	---	---	--

<p>FSB-054YJ</p>  <p>Super strength-saving mini-type crimping plier ◆ Crimping Capacity: Max 4mm²</p>	<p>FSC-0510GF FSA-056YJ</p>  <p>Super strength-saving crimping plier ◆ Crimping Capacity: Max 10mm²</p>	<p>SN Series</p>  <p>Mini european style crimping plier ◆ Crimping Capacity: Max 2.5mm²</p>	<p>HS Series</p>  <p>8" ratchet crimping plier (European style) ◆ Crimping Capacity: Max 16mm²</p>
---	---	--	--

<p>HS Series</p>  <p>9" ratchet crimping plier (European style) ◆ Crimping Capacity: Max 25mm²</p>	<p>AP Series</p>  <p>New generation of energy saving crimping pliers ◆ Crimping Capacity: Max 16mm²</p>	<p>LAS Series</p>  <p>New generation of energy saving crimping pliers ◆ Crimping Capacity: Max 10mm²</p>	<p>HS-1MA</p>  <p>Mini crimping pliers (for non-insulated terminals) ◆ Crimping Capacity: Max 2.5mm²</p>
---	---	--	--

<p>FS-3B1/2/3</p>  <p>Japanese style crimping pliers (for non-insulated terminals) ◆ Crimping Capacity: Max 2.5mm²</p>	<p>HS-202B</p>  <p>Multi-functional crimping pliers ◆ Crimping Capacity: Max 2.5mm²</p>	<p>HS-6M</p>  <p>Mini crimping pliers (for insulated terminals) ◆ Crimping Capacity: Max 2.5mm²</p>	<p>FS Series</p>  <p>Multi-functional crimping pliers</p>
--	---	---	--

<p>HS-313</p>  <p>Multi-functional crimping pliers</p>	<p>DR-1 DR-2</p>  <p>Super strength-saving crimping plier ◆ Crimping Capacity: Max 6.3mm²</p>	<p>DR-2546B</p>  <p>Super strength-saving crimping plier ◆ Crimping Capacity: Max 6mm²</p>	<p>C8K Series</p>  <p>Mini combination tools</p>
---	---	--	---

<p>HSC8 1-4</p>  <p>Four-mandrel crimping pliers for turned contacts ◆ Crimping Capacity: Max 6mm²</p>	<p>W Series</p>  <p>Four-mandrel crimping pliers for turned contacts</p>	<p>PZ Series</p>  <p>Germany style small crimping plier ◆ Crimping Capacity: Max 35mm²</p>	<p>T-S Series</p>  <p>Bare terminal crimper (Japan type) ◆ Crimping Capacity: Max 16mm²</p>
--	---	--	---

<p>HX Series</p>  <p>Y.O copper tube terminal crimping tool ◆ Crimping Capacity: Max 240mm²</p>	<p>CT Series</p>  <p>Y.O copper tube terminal crimping tool ◆ Crimping Capacity: Max 150mm²</p>	<p>KH Series</p>  <p>Y.O copper tube terminal crimping tool ◆ Crimping Capacity: Max 240mm²</p>	<p>FS Series</p>  <p>Y.O copper tube terminal crimping tool ◆ Crimping Capacity: Max 300mm²</p>
---	---	---	---

<p>LY05H-5A2</p>  <p>Y.O copper tube terminal crimping tool</p>	<p>LY03C-5D3</p>  <p>Y.O copper tube terminal crimping tool</p>	<p>FSK Series</p>  <p>Mini combination tools</p>	<p>HSC Series</p>  <p>Combination tools in metal box</p>
<p>SN-02CAD</p>  <p>Combination tools in metal box</p>	<p>FSA-0625 FSA-0626</p>  <p>Cable wire stripper ◆ Cutting Capacity: Max 30mm</p>	<p>DR-310A DR-801</p>  <p>Cable wire stripper ◆ Crimping Capacity: Max 35mm²</p>	<p>FSB-1080 FSB-1030 HS-109</p>  <p>Thin sideling blade pliers</p>
<p>HJ Series</p>  <p>Plastic cutter pliers</p>	<p>31HS~36HS</p>  <p>Cable knife</p>	<p>HS Series</p>  <p>Cutter & stripper</p>	<p>WS-16</p>  <p>Self-adjusting insulation strippers</p>
<p>FS-D3</p>  <p>Self-adjusting insulation strippers</p>	<p>HS-1041C</p>  <p>Cutter & stripper</p>	<p>YF-052 YF-053</p>  <p>Cutter & stripper</p>	<p>HS-D1 HS-D2</p>  <p>Wire stripper ◆ Crimping Capacity: Max 6mm²</p>


<p>HS-731</p>  <p>Wire stripper ◆ Crimping Capacity: Max 6mm²</p>	<p>HS-700B</p>  <p>Automatic wire strippers ◆ Crimping Capacity: Max 3.2mm²</p>	<p>HS-700D</p>  <p>Automatic wire strippers ◆ Crimping Capacity: Max 6mm²</p>	<p>LY25 Series</p>  <p>Wire stripper</p>
<p>HT-200R</p>  <p>Network tools</p>	<p>HT-86</p>  <p>Network tools</p>	<p>HT Series</p>  <p>Network tools</p>	<p>HS Series</p>  <p>Network tools</p>
<p>TL-H510B</p>  <p>Network tools</p>	<p>FSB-DE156</p>  <p>Network tools</p>	<p>HT-500R HT-208M</p>  <p>Network tools</p>	<p>HS-210N</p>  <p>Network tools</p>
<p>LY-214</p>  <p>Network tools</p>	<p>HT-315DR</p>  <p>LAS-PLUS insert tool</p>	<p>HT Series</p>  <p>Insert tool ◆ Crimping Capacity: Max 6mm²</p>	<p>HT Series TL-322</p>  <p>Wire stripper</p>

PC Series



Cutters for plastic pipes

DR-10A



Sealing plier



Manual crimping tool



Multifunctional V-shaped powerful punching pliers




6" Multipurpose electrician's scissors

- ◆ AWG10-12-14-16-18-20-22



7" Multipurpose wire stripper

- ◆ AWG10-12-14-16-18-20-22




7" Multipurpose electrician scissors

- ◆ AWG12-14-16-18



8" Multifunctional electrician scissors

- ◆ AWG10-12-14-16-18-20-22



MC4 tools



MC4 tools



MC4 connectors



Fishing tape in reusable case

- ◆ Length: 10-100m
- ◆ Spec: 1.3x3mm



Fishing tape (Fiberglass)

- ◆ Length: 15-75m
- ◆ Diam: φ4mm




Fishing tape (Nylon)

- ◆ Length: 10-30m
- ◆ Diam: φ4mm



Fish tape electrical wire puller

- ◆ Length: 5-60m
- ◆ Diam: φ3-5mm




Cable puller (Nylon) solid

- ◆ Length: 5-30m
- ◆ Diam: φ3-4mm



Cable puller (Fiberglass) with filling

- ◆ Length: 5-30m
- ◆ Diam: φ3-6mm




Cable puller (Polyester) twist

- ◆ Length: 15-50m
- ◆ Diam: φ6mm



Cable puller with conduit twine

- ◆ Length: 15-50m
- ◆ Diam: φ4-6mm




Cable zip ties

- ◆ Length: 0.22m
- ◆ Diam: φ1.2mm



Cable glands

- ◆ Applicable to Cable: 3-92mm



Terminal



Pagoda drill



Pagoda drill



Pagoda drill



Pagoda drill



Pagoda drill



Pagoda drill



Pagoda drill



Bimetal-drill



Metal drill



Ruler

